

GlowZone 1571SS Aluminum Exit Signs

Tomorrows Photoluminescent Technology for a Safer Today

Features

- No energy consumption
- Non-toxic, non-radioactive
- Designed for surface, flag and ceiling mount
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Can be used for both high level and low level applications
- Tested and approved for low impact
- Requires virtually no maintenance – no bulbs, no battery replacement

Technical Information

Sizes: 8.5" x 15.75"
 Background: Stainless steel color
 Lettering: Photoluminescent lettering with a green or red outline
 Illumination: High Visibility Chartreuse (light green/yellow)
 Visibility: 50 feet
 Directional: Chevron kit included (Field Applied)
 Construction: Aluminum body with stainless steel look

Life Expectancy

25+ years

Power Requirements

No additional electrical or mechanical source required

Installation

Surface, flag or ceiling mounted options. Frame and Bracket are additional items. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

Applications



Both high level and low level
 Suitable for floor proximity installation

Approvals:


Meets NFPA Life Safety Code 101 and OSHA
 Meets International Building and Fire Codes
 Listed through UL 924 for the USA and Canada
 Listed with the State of California State Fire Marshal

Job Name: _____
 Type: _____
 Approved By: _____
 Distributor: _____


Photoluminescent Lettering

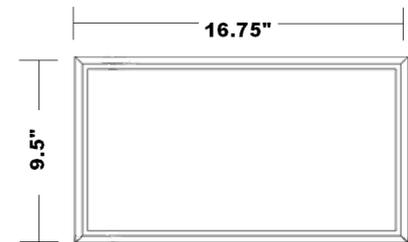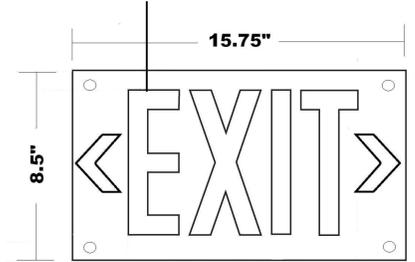

Optional Frame and Universal Bracket

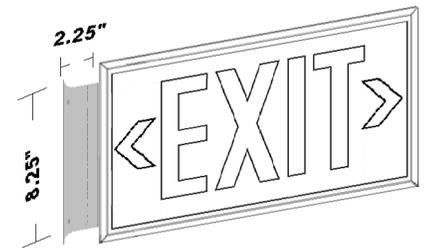

Flag Mount Option

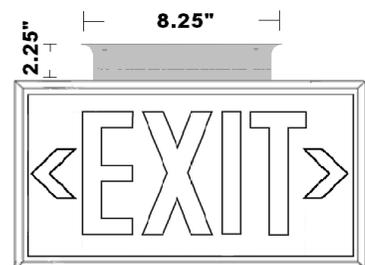

Ceiling Mount Option

Model Numbers	Outline of Lettering	No. of Faces	Unframed/Framed	Universal Bracket
1571SS-r	Red	1 - single sided	NF - unframed	UB - universal bracket
1571SS-g	Green	2 - double sided	F - framed	

GlowZone, Inc.
 620 Lunar Avenue, Brea, CA 92821
 PH: 714-256-2202 FAX: 714-256-2208
 Internet: www.glowzone.com

